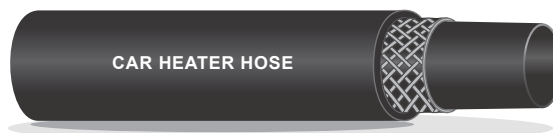


CAR HEATER HOSE

EXTRUSION

Application: Designed for transfer of hot water in automotive heating system.

Temperature: -40°C (-40°F) to +100°C (+212°F)





Tube: Black, smooth, EPDM rubber.

Reinforcement: High strength synthetic yarn.

Cover: Black, smooth, EPDM rubber.

Wellcall recommends using the **STAMPED** process to aid in determining the correct hose for your application.

 I.D.		 O.D.	 Work Pressure		 Burst Pressure		 Max. Length	
inch	mm	mm	bar	psi	bar	psi	m	ft
3/8"	9.5	17.0	7	105	21	315	100	330
1/2"	12.7	20.0	7	105	21	315	100	330
5/8"	15.9	24.0	7	105	21	315	100	330
3/4"	19.1	27.0	7	105	21	315	100	330
1"	25.4	35.0	7	105	21	315	100	330

Commonly Available Upon Request:

- Different Diameter
- Different Temperature
- Different Length
- Different Pressure
- Different Colour of Rubber