


COMPRESSED AIR HOSE

MANDREL

Application: Softwall hose designed for compressed air applications in industries, construction sites and mines.

Temperature: -40°C (-40°F) to +70°C (+158°F)

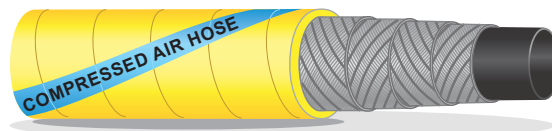






Tube: Black, smooth, synthetic rubber, oil mist resistant.

Reinforcement: High strength synthetic cord.

Cover: Yellow, smooth (wrapped finish), synthetic rubber, weathering resistant.

Optional Request: ISO 2398.

Wellcall recommends using the **STAMPED** process to aid in determining the correct hose for your application.

 I.D.		 O.D.	 Work Pressure		 Burst Pressure		 Max. Length	
inch	mm	mm	bar	psi	bar	psi	m	ft
3/4"	19.1	30.0	20	300	60	900	61	200
1"	25.4	37.0	20	300	60	900	61	200
1-1/4"	31.8	45.0	20	300	60	900	61	200
1-1/2"	38.1	52.0	20	300	60	900	61	200
2"	50.8	66.0	20	300	60	900	61	200
2-1/2"	63.5	79.0	20	300	60	900	61	200
3"	76.2	92.0	20	300	60	900	61	200
4"	101.6	120.0	20	300	60	900	61	200

Commonly Available Upon Request:

- Different Diameter
- Different Temperature
- Different Length
- Different Pressure
- Different Colour of Rubber