


FRAS AIR / WATER HOSE

MANDREL

Application: Softwall hose specially designed to convey air, stone dust and water underground coal mines.

Temperature: -20°C (-4°F) to +70°C (+158°F)

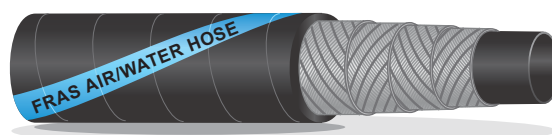


Tube: Black, smooth, synthetic rubber.

Reinforcement: High strength synthetic yarn.

Cover: Black, smooth (wrapped finish), fire resistant and conductive synthetic rubber.

Optional Request: AS 2660 Class A.

Wellcall recommends using the **STAMPED** process to aid in determining the correct hose for your application.

 I.D.		 O.D.	 Work Pressure		 Burst Pressure		 Max. Length	
inch	mm	mm	bar	psi	bar	psi	m	ft
1/2"	12.7	23.0	17.5	260	70	1050	61	200
5/8"	15.9	27.0	17.5	260	70	1050	61	200
3/4"	19.1	30.0	17.5	260	70	1050	61	200
1"	25.4	37.0	17.5	260	70	1050	61	200
1-1/4"	31.8	45.0	17.5	260	70	1050	61	200
1-1/2"	38.1	52.0	17.5	260	70	1050	61	200
2"	50.8	66.0	17.5	260	70	1050	61	200
2-1/2"	63.5	79.0	17.5	260	70	1050	61	200
3"	76.2	92.0	17.5	260	70	1050	61	200
4"	101.6	120.0	17.5	260	70	1050	61	200
6"	152.4	174.0	17.5	260	70	1050	61	200

Commonly Available Upon Request:

- Different Diameter
- Different Temperature
- Different Length
- Different Pressure
- Different Colour of Rubber