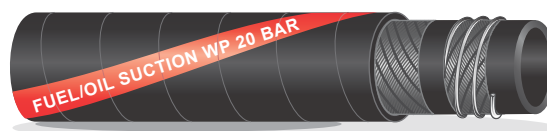


FUEL / OIL SUCTION HOSE (20 BAR)

MANDREL

Application: Hardwall hose designed for suction and delivery of petroleum products with aromatic content up to 50% for fuel connector service.

Temperature: -20°C (-4°F) to +80°C (+176°F)




Tube: Black, smooth, nitrile rubber.

Reinforcement: High strength synthetic cord and helix wire.

Cover: Black, smooth (wrapped finish), synthetic rubber, oil and weathering resistant.


Optional Request: Corrugated (wrapped finish); Anti-static wire.

Wellcall recommends using the **STAMPED** process to aid in determining the correct hose for your application.

 I.D.		 O.D.	 Work Pressure		 Burst Pressure		 Max. Length	
inch	mm	mm	bar	psi	bar	psi	m	ft
1/2"	12.7	23.0	20	300	60	900	61	200
5/8"	15.9	27.0	20	300	60	900	61	200
3/4"	19.1	31.0	20	300	60	900	61	200
7/8"	22.2	34.0	20	300	60	900	61	200
1"	25.4	37.0	20	300	60	900	61	200
1-1/8"	28.6	40.0	20	300	60	900	61	200
1-3/16"	30.2	42.0	20	300	60	900	61	200
1-1/4"	31.8	44.0	20	300	60	900	61	200
1-5/16"	33.3	45.0	20	300	60	900	61	200
1-3/8"	34.9	47.0	20	300	60	900	61	200
1-1/2"	38.1	50.0	20	300	60	900	61	200
1-9/16"	39.7	52.0	20	300	60	900	61	200
1-5/8"	41.3	54.0	20	300	60	900	61	200
1-3/4"	44.5	58.0	20	300	60	900	61	200
1-7/8"	47.6	62.0	20	300	60	900	61	200
2"	50.8	66.0	20	300	60	900	61	200
2-1/8"	54.0	69.0	20	300	60	900	61	200
2-1/4"	57.2	72.0	20	300	60	900	61	200
2-5/16"	58.7	74.0	20	300	60	900	40	130
2-3/8"	60.3	76.0	20	300	60	900	61	200
2-1/2"	63.5	79.0	20	300	60	900	61	200
2-5/8"	66.7	83.0	20	300	60	900	61	200
2-3/4"	69.9	86.0	20	300	60	900	61	200
2-7/8"	73.0	89.0	20	300	60	900	61	200
3"	76.2	92.0	20	300	60	900	61	200
3-1/8"	79.4	96.0	20	300	60	900	61	200
3-1/2"	88.9	106.0	20	300	60	900	61	200
3-5/8"	92.0	110.0	20	300	60	900	40	130
3-3/4"	95.0	113.0	20	300	60	900	40	130
4"	101.6	120.0	20	300	60	900	61	200
4-3/8"	111.0	130.0	20	300	60	900	40	130
4-1/2"	114.3	134.0	20	300	60	900	61	200

FUEL / OIL SUCTION HOSE (20 BAR)

MANDREL

 I.D.		 O.D.	 Work Pressure		 Burst Pressure		 Max. Length	
inch	mm	mm	bar	psi	bar	psi	m	ft
5"	127.0	149.0	20	300	60	900	61	200
5-1/2"	140.0	162.0	20	300	60	900	30	100
6"	152.4	174.0	20	300	60	900	61	200
6-5/16"	160.3	182.0	20	300	60	900	30	100
6-5/8"	168.3	190.0	20	300	60	900	30	100
7"	178.0	201.0	20	300	60	900	30	100
8"	203.2	227.0	20	300	60	900	61	200
8-5/8"	219.1	247.0	20	300	60	900	30	100
10"	254.0	285.0	20	300	60	900	12	40
12"	304.8	339.0	20	300	60	900	12	40

Commonly Available Upon Request:

- Different Diameter
- Different Temperature
- Different Length
- Different Pressure
- Different Colour of Rubber