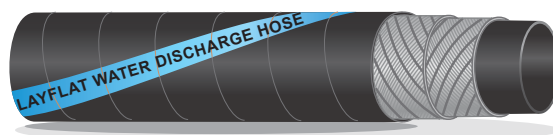


LAY FLAT WATER DISCHARGE HOSE

MANDREL

Application: Light weight and lay flat softwall hose, designed for the delivery of industrial waste waters in submerged pumps and mobile irrigation systems usage.

Temperature: -30°C (-22°F) to +70°C (+158°F)




Tube: Black, smooth, synthetic rubber.

Reinforcement: High strength synthetic cord.


Cover: Black, smooth (wrapped finish), synthetic rubber, weathering resistant.

Wellcall recommends using the **STAMPED** process to aid in determining the correct hose for your application.

 I.D.		 O.D.	 Work Pressure		 Burst Pressure		 Max. Length	
inch	mm	mm	bar	psi	bar	psi	m	ft
1"	25.4	33.0	5	75	15	225	61	200
1-1/8"	28.6	36.0	5	75	15	225	61	200
1-3/16"	30.2	38.0	5	75	15	225	61	200
1-1/4"	31.8	40.0	5	75	15	225	61	200
1-5/16"	33.3	42.0	5	75	15	225	61	200
1-3/8"	34.9	44.0	5	75	15	225	61	200
1-1/2"	38.1	47.0	5	75	15	225	61	200
1-9/16"	39.7	48.0	5	75	15	225	61	200
1-5/8"	41.3	50.0	5	75	15	225	61	200
1-3/4"	44.5	53.0	5	75	15	225	61	200
1-7/8"	47.6	56.0	5	75	15	225	61	200
2"	50.8	59.0	5	75	15	225	61	200
2-1/8"	54.0	63.0	5	75	15	225	61	200
2-1/4"	57.2	66.0	5	75	15	225	61	200
2-5/16"	58.7	67.0	5	75	15	225	40	130
2-3/8"	60.3	69.0	5	75	15	225	61	200
2-1/2"	63.5	72.0	5	75	15	225	61	200
2-5/8"	66.7	76.0	5	75	15	225	61	200
2-3/4"	69.9	79.0	5	75	15	225	61	200
2-7/8"	73.0	82.0	5	75	15	225	61	200
3"	76.2	85.0	5	75	15	225	61	200
3-1/8"	79.4	88.0	5	75	15	225	61	200
3-1/2"	88.9	98.0	5	75	15	225	61	200
3-5/8"	92.0	101.0	5	75	15	225	40	130
3-3/4"	95.0	105.0	5	75	15	225	40	130
4"	101.6	112.0	5	75	15	225	61	200
4-3/8"	111.0	121.0	5	75	15	225	40	130
4-1/2"	114.3	126.0	5	75	15	225	61	200
5"	127.0	139.0	5	75	15	225	61	200
5-1/2"	140.0	153.0	5	75	15	225	30	100
6"	152.4	165.0	5	75	15	225	61	200
6-5/16"	160.3	173.0	5	75	15	225	30	100

LAY FLAT WATER DISCHARGE HOSE

MANDREL

 I.D.		 O.D.	 Work Pressure		 Burst Pressure		 Max. Length	
inch	mm	mm	bar	psi	bar	psi	m	ft
6-5/8"	168.3	182.0	5	75	15	225	30	100
7"	178.0	192.0	5	75	15	225	30	100
8"	203.2	217.0	5	75	15	225	61	200
8-5/8"	219.1	233.0	5	75	15	225	30	100
10"	254.0	268.0	5	75	15	225	12	40
12"	304.8	320.0	5	75	15	225	12	40
14"	355.6	374.0	5	75	15	225	12	40
16"	406.4	426.0	5	75	15	225	12	40
18"	457.2	478.0	5	75	15	225	12	40
20"	508.0	530.0	5	75	15	225	6	20

Commonly Available Upon Request:

- Different Diameter
- Different Temperature
- Different Length
- Different Pressure
- Different Colour of Rubber