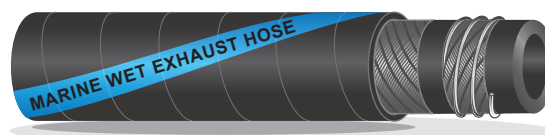


MARINE WET EXHAUST SUCTION HOSE

MANDREL

Application: Hardwall hose designed for suction and delivery of water cooled diesel engine exhaust gas systems installed on a small craft less than 24m in length or pleasure yachts.

Temperature: -30°C (-22°F) to +121°C (+250°F)





Tube: Black, smooth, synthetic rubber.

Reinforcement: High strength synthetic cord and helix wire.

Cover: Black, smooth (wrapped finish), synthetic rubber, weathering and abrasion resistant.

Optional Request: SAE J2006, Style R2.

Wellcall recommends using the **STAMPED** process to aid in determining the correct hose for your application.

 I.D.		 O.D.	 Work Pressure		 Burst Pressure		 Max. Length	
inch	mm	mm	bar	psi	bar	psi	m	ft
3/4"	19.1	28.0	3	45	9	135	61	200
7/8"	22.2	31.0	3	45	9	135	61	200
1"	25.4	34.0	3	45	9	135	61	200
1-1/8"	28.6	38.0	3	45	9	135	61	200
1-3/16"	30.2	40.0	3	45	9	135	61	200
1-1/4"	31.8	42.0	3	45	9	135	61	200
1-5/16"	33.3	43.0	3	45	9	135	61	200
1-3/8"	34.9	45.0	3	45	9	135	61	200
1-1/2"	38.1	48.0	3	45	9	135	61	200
1-9/16"	39.7	50.0	3	45	9	135	61	200
1-5/8"	41.3	52.0	3	45	9	135	61	200
1-3/4"	44.5	55.0	3	45	9	135	61	200
1-7/8"	47.6	59.0	3	45	9	135	61	200
2"	50.8	62.0	3	45	9	135	61	200
2-1/8"	54.0	66.0	3	45	9	135	61	200
2-1/4"	57.2	69.0	3	45	9	135	61	200
2-3/8"	60.3	72.0	3	45	9	135	61	200
2-1/2"	63.5	76.0	3	45	9	135	61	200
2-5/8"	66.7	79.0	3	45	9	135	61	200
2-3/4"	69.9	83.0	3	45	9	135	61	200
2-7/8"	73.0	86.0	3	45	9	135	61	200
3"	76.2	89.0	3	45	9	135	61	200
3-1/8"	79.4	93.0	3	45	9	135	61	200
3-1/2"	88.9	103.0	3	45	9	135	61	200
4"	101.6	116.0	3	45	9	135	61	200
4-1/2"	114.3	129.0	3	45	9	135	61	200
5"	127.0	142.0	3	45	9	135	61	200
6"	152.4	167.0	3	45	9	135	61	200
8"	203.2	219.0	3	45	9	135	61	200

Commonly Available Upon Request:

- Different Diameter
- Different Temperature
- Different Length
- Different Pressure
- Different Colour of Rubber