


# OIL RETURN HOSE

MANDREL

**Application:** Hardwall hose designed for petroleum and water-bases hydraulic fluids in low pressure and vacuum service.

**Temperature:** -40°C (-40°F) to +100°C (+212°F)

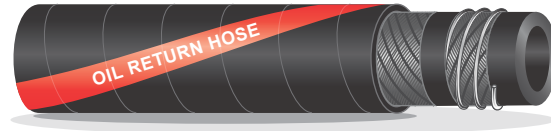






**Tube:** Black, smooth, nitrile rubber.

**Reinforcement:** High strength synthetic cord with helix wire.

**Cover:** Black, smooth (wrapped finish), synthetic rubber, oil and weathering resistant.

Wellcall recommends using the **STAMPED** process to aid in determining the correct hose for your application.

 <b>I.D.</b>		 <b>O.D.</b>	 <b>Work Pressure</b>		 <b>Burst Pressure</b>		 <b>Max. Length</b>	
inch	mm	mm	bar	psi	bar	psi	m	ft
3/4"	19.1	31.5	21	315	84	1260	61	200
1"	25.4	40.0	17	255	68	1020	61	200
1-1/4"	31.8	46.5	14	210	56	840	61	200
1-1/2"	38.1	53.0	10	150	40	600	61	200
2"	50.8	65.5	7	105	28	420	61	200
2-1/2"	63.5	78.5	4	60	16	240	61	200
3"	76.2	91.0	4	60	16	240	61	200

## Commonly Available Upon Request:

- Different Diameter
- Different Temperature
- Different Length
- Different Pressure
- Different Colour of Rubber