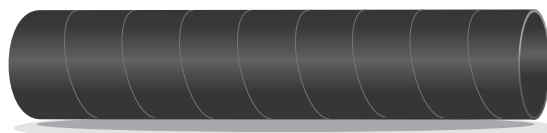


PROTECTIVE COVER HOSE

MANDREL

Application: Designed for protecting hose used in electronic, electrical and sewage industries.

Temperature: -25°C (-13°F) to +80°C (+176°F)





Tube: Black, smooth, synthetic rubber.

Reinforcement: -

Cover: Black, smooth (wrapped finish), synthetic rubber, weathering resistant.

Wellcall recommends using the **STAMPED** process to aid in determining the correct hose for your application.

 I.D.		 O.D.	 Work Pressure		 Burst Pressure		 Max. Length	
inch	mm	mm	bar	psi	bar	psi	m	ft
5/8"	15.9	19.0	-	-	-	-	40	130
3/4"	19.1	22.0	-	-	-	-	40	130
7/8"	22.2	25.0	-	-	-	-	40	130
1"	25.4	28.0	-	-	-	-	40	130
1-3/127"	26.0	28.0	-	-	-	-	40	130
1-1/8"	28.6	31.0	-	-	-	-	40	130
1-3/16"	30.2	33.0	-	-	-	-	40	130
1-1/4"	31.8	35.0	-	-	-	-	40	130
1-3/8"	34.9	38.0	-	-	-	-	40	130
1-1/2"	38.1	41.0	-	-	-	-	40	130
1-9/16"	39.7	43.0	-	-	-	-	40	130
1-5/8"	41.3	45.0	-	-	-	-	40	130
1-3/4"	44.5	48.0	-	-	-	-	40	130
1-7/8"	47.6	51.0	-	-	-	-	40	130
2"	50.8	54.0	-	-	-	-	40	130

Commonly Available Upon Request:

- Different Diameter
- Different Temperature
- Different Length
- Different Pressure
- Different Colour of Rubber