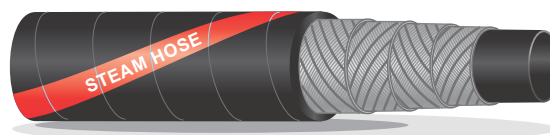


STEAM HOSE

MANDREL

Application: Softwall hose designed for delivery of steam and hot water.

Temperature: -20°C (-4°F) to +170°C (+338°F) (Steam), +95°C (203°F) (Hot Water)





Tube: Black, smooth, EPDM rubber.

Reinforcement: High strength synthetic cord.

Cover: Blue, smooth (wrapped finish), EPDM rubber.

Wellcall recommends using the **STAMPED** process to aid in determining the correct hose for your application.

 I.D.		 O.D.	 Work Pressure		 Burst Pressure		 Max. Length	
inch	mm	mm	bar	psi	bar	psi	m	ft
1/2"	12.7	24.0	7	105	70	1050	61	200
5/8"	15.9	28.0	7	105	70	1050	61	200
3/4"	19.1	32.0	7	105	70	1050	61	200
1"	25.4	39.0	7	105	70	1050	61	200

Commonly Available Upon Request:

- Different Diameter
- Different Temperature
- Different Length
- Different Pressure
- Different Colour of Rubber