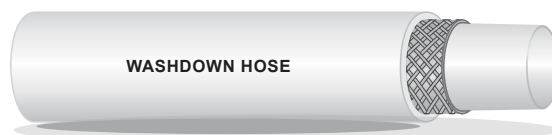


WASHDOWN HOSE

EXTRUSION

Application: Designed for hot water wash-down suitable for food / dairy processing industry, bottling plants and breweries.

Temperature: -30°C (-22°F) to +100°C (+212°F)





Tube: White, smooth, synthetic rubber.

Reinforcement: High strength synthetic yarn.

Cover: White, smooth, synthetic rubber, weathering resistant.

Wellcall recommends using the **STAMPED** process to aid in determining the correct hose for your application.

 I.D.		 O.D.	 Work Pressure		 Burst Pressure		 Max. Length	
inch	mm	mm	bar	psi	bar	psi	m	ft
3/8"	9.5	19.0	16	240	48	720	100	330
1/2"	12.7	23.0	16	240	48	720	100	330
5/8"	15.9	27.0	16	240	48	720	100	330
3/4"	19.1	32.0	16	240	48	720	100	330
1"	25.4	39.0	16	240	48	720	100	330

Commonly Available Upon Request:

- Different Diameter
- Different Temperature
- Different Length
- Different Pressure
- Different Colour of Rubber