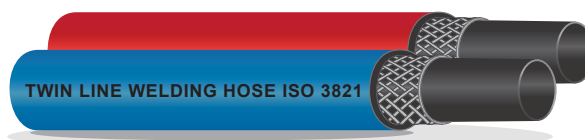


TWIN LINE WELDING HOSE

EXTRUSION

Application: Designed for welding, cutting and allied processes.

Temperature: -20°C (-4°F) to +70°C (+158°F)





Tube: Black, smooth, synthetic rubber.

Reinforcement: High strength synthetic yarn.

Cover: Red & Blue, smooth, synthetic rubber, weathering resistant.

Optional Request: ISO 3821; AS/NZS 1869.

Wellcall recommends using the STAMPED process to aid in determining the correct hose for your application.

 I.D.		 O.D.	 Work Pressure		 Burst Pressure		 Max. Length	
inch	mm	mm	bar	psi	bar	psi	m	ft
3/16"	4.8 + 4.8	12.0 + 12.0	20	300	60	900	120	400
1/4"	6.4 + 6.4	13.0 + 13.0	20	300	60	900	120	400
5/16"	7.9 + 7.9	15.0 + 15.0	20	300	60	900	120	400
5/16" + 3/8"	7.9 + 9.5	16.0 + 16.0	20	300	60	900	100	330
3/8"	9.5 + 9.5	17.0 + 17.0	20	300	60	900	100	330

Commonly Available Upon Request:

- Different Diameter
- Different Temperature
- Different Length
- Different Pressure
- Different Colour of Rubber